




Kit 14 mm FRP panel

Range : GVW 6,5 ton ratings max.

Family : FRP panel – 14 mm

Execution : **EUROPAL**

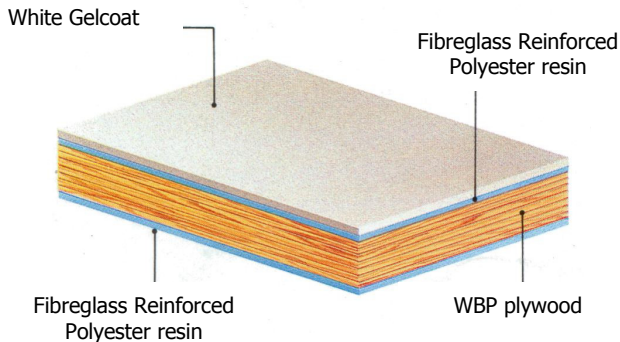

DIMENSIONS (mm)

External length : 1 500 to 6 000 mm

External width : 2 350 mm max.

Internal height :

2 350 mm max. with top flap

2 400 mm max. with 2 barn doors

REAR FRAME

- Bolted rear frame – no welding
- Mill finish or anodized aluminium uprights
- Top and bottom cross-members in galvanized steel or stainless steel
- 270° opening barn doors in 30 mm insulated panel
- 1 stainless steel recessed lock on right door leaf

OPTIONAL EXTRAS

- Steel rear frame
- Top flap in combination with tail-lift
- Roller shutter door
- No doors – rear panel same as front

SIDE WALLS

- 14 mm Fibreglass Reinforced Plywood panel GRP on both sides (close to colour white RAL 9010)

OPTIONAL EXTRAS

- Galvanized skirting board
- Lashing rails, lashing tubes, interior protections for removal box
- Single swing, double swing or sliding door
- Roll-up door

FRONT BULKHEAD

- 14 mm FRP panel (close to colour white RAL 9010)

OPTIONAL EXTRAS

- Galvanized skirting board
- Lashing rails, lashing tubes, interior protections for removal box
- Trap door – sliding trap door
- Polyester nose cone

ROOF

- Mill finish or anodized aluminium profiles
- One piece aluminium or translucent roof riveted to the roof frame

OPTIONAL EXTRAS

- Clear light or translucent strip
- Insulated panel
- Ceiling light – 4 LED lamps

SUB-FRAME (Optional extra)

- Mill finish aluminium sub-frame in kit format
- Main beams in aluminium
- Cross-members in aluminium or galvanized steel

OPTIONAL EXTRAS

- Mudwings - side-guards
- Footsteps (4 rungs)

