




Kit LIGHTWEIGHT panel

Range : GVW 6,5 ton ratings max.

Family : Lightweight – PET foam high density

Lightweight – Polypropylene honeycomb core

Execution : **EUROPAL**

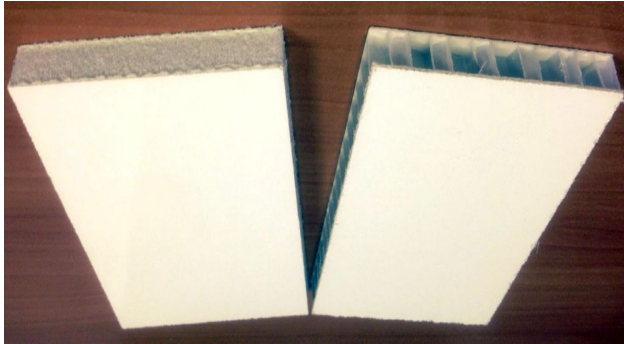

DIMENSIONS (mm)

External length : 1 500 to 5 400 mm

External width : 2 350 mm max.

Internal height :

2 350 mm max. with top flap

2 400 mm max. with 2 barn doors

REAR FRAME

- Bolted rear frame, no welding
- Mill finish or anodized aluminium uprights
- Top and bottom cross-members in galvanized steel
- 270° opening barn doors in 30 mm insulated panel
- 1 stainless steel recessed lock on right door leaf

OPTIONAL EXTRAS

- Steel rear frame
- Top flap in combination with tail-lift
- Roller shutter door
- No doors – rear panel same as front

SIDE PANELS

- 17 mm lightweight panels
- Smooth polyester face (close to colour white RAL 9010)

2 options :

- Polyethylene PET foam (weight **5,2 kg/sqm**)
- Polypropylene honeycomb core (weight **6 kg/sqm**)

OPTIONAL EXTRAS

- Lashing rails, lashing tubes, interior protections for removal box
- Single swing, double swing or sliding door
- Roll-up door

FRONT BULKHEAD

- 17 mm Fibreglass Reinforced Plywood panel or 17 mm lightweight panel

OPTIONAL EXTRAS

- Lashing rails, lashing tubes, interior protections for removal box
- Trap door – sliding trap door
- Polyester nose cone

ROOF

- Mill finish or anodized aluminium profiles
- 1 piece aluminium or translucent roof riveted to the roof frame

SUB-FRAME (optional extra)

- Mill finish aluminium sub-frame in kit format
- Main beams in aluminium
- Cross-members in aluminium or galvanized steel

OPTIONAL EXTRAS

- Mudwings - side-guards
- Footsteps (4 rungs)

